


# SIZE TABLES - Garage door series Secur Plus

## Protruding leaf

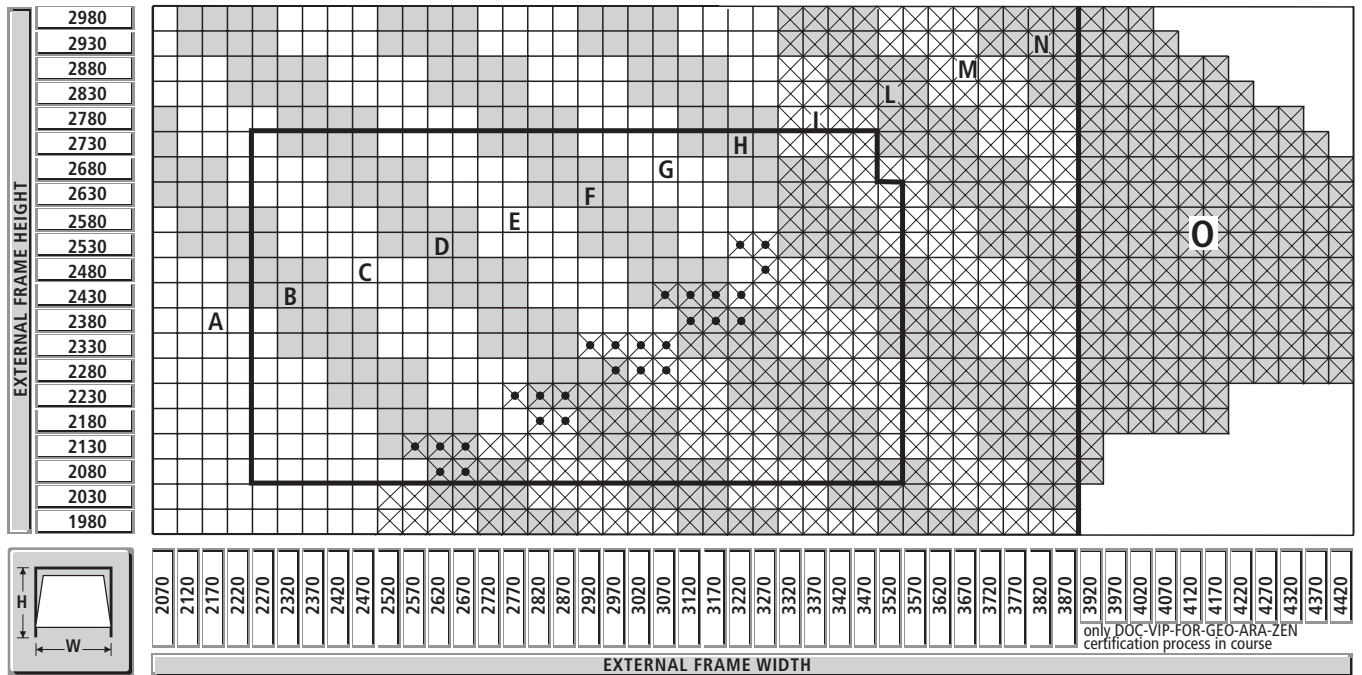


Production limit with central standard pedestrian door  
NB: if with pedestrian door, the Securmatic motorisation is compulsory

Doors with frame uprights 135 mm wide (instead of 110 mm)

Doors with frame uprights 135 mm wide only in presence of pedestrian door

## Non protruding leaf

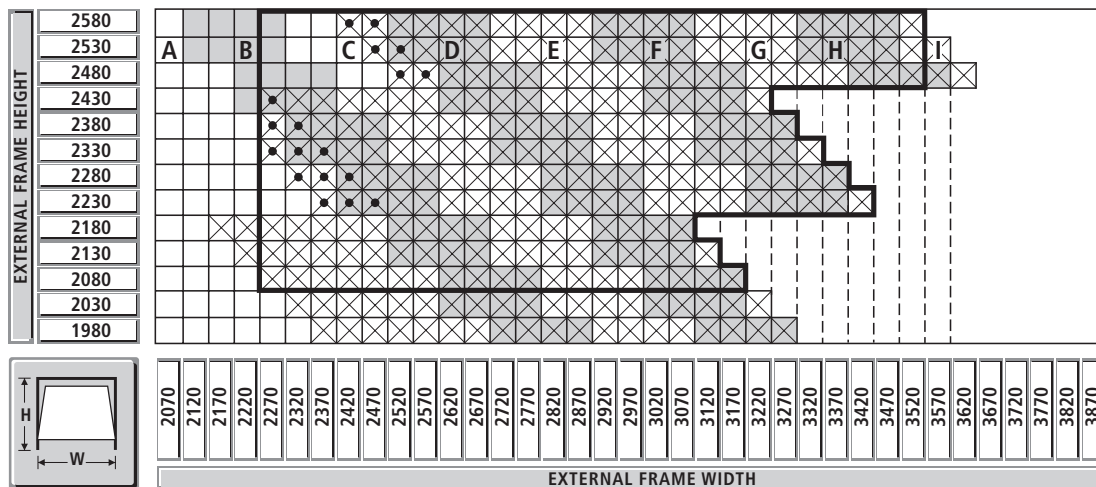


Production limit with central standard pedestrian door  
NB: if with pedestrian door, the Securmatic motorisation is compulsory

Doors with frame uprights 135 mm wide (instead of 110 mm)


Doors with frame uprights 135 mm wide only in presence of pedestrian door

# SIZE TABLES - Garage door series Secur


## Protruding leaf


EXTERNAL FRAME HEIGHT	3430 / 3480																					EXTRA STANDARD DIMENSIONS (mod. DOC, VIP, GEO, TAU and ARA in Okoume wood not feasible)																			
	3330 / 3380																																								
	3230 / 3280																																								
	3130 / 3180																																								
	3030 / 3080																																								
	2930 / 2980																																								
	2830 / 2880																																								
	2730 / 2780	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R	S	T	U																						
	2630 / 2680																																								
	2530 / 2580																																								
	2430 / 2480																																								
	2330 / 2380																																								
	2230 / 2280																																								
	2130 / 2180	A																																							
	2030 / 2080																																								
1980																																									
	2070	2120 / 2170	2220 / 2270	2320 / 2370	2420 / 2470	2520 / 2570	2620 / 2670	2720 / 2770	2820 / 2870	2920 / 2970	3020 / 3070	3120 / 3170	3220 / 3270	3320 / 3370	3420 / 3470	3520 / 3570	3620 / 3670	3720 / 3770	3820 / 3870	3920 / 3970	4020 / 4070	4120 / 4170	4220 / 4270	4320 / 4370	4420 / 4470	4520 / 4570	4620 / 4670	4720 / 4770	4820 / 4870	4920 / 4970	5020 / 5070	5120 / 5170	5220 / 5270	5320 / 5370	5420 / 5470	5520 / 5570	5620 / 5670	5720 / 5770	5820 / 5870	5920 / 5970	
	EXTERNAL FRAME WIDTH																																								

\* SECUR doors higher than 2980 mm are not certified class 1.

 Doors with frame uprights 135 mm wide (instead of 110 mm)

## Non protruding leaf

EXT. FRAME H.	2530 / 2580	B	C	D	E	F	G	H	I	L	M																			
	2430 / 2480																													
	2330 / 2380																													
	2230 / 2280																													
	2130 / 2180	A																												
	2030 / 2080																													
1980																														
	2070	2120 / 2170	2220 / 2270	2320 / 2370	2420 / 2470	2520 / 2570	2620 / 2670	2720 / 2770	2820 / 2870	2920 / 2970	3020 / 3070	3120 / 3170	3220 / 3270	3320 / 3370	3420 / 3470	3520 / 3570	3620 / 3670	3720 / 3770	3820 / 3870	3920 / 3970										
	EXTERNAL FRAME WIDTH																													

 Doors with frame uprights 135 mm wide (instead of 110 mm)

# SILVELOX

le porte per eccellenza

Silvelox S.p.A. - I 38050 CASTELNUOVO (TN) - Viale Venezia, 37  
Tel. +39 0461 755 755 - Fax +39 0461 752 466

[www.silvelox.com](http://www.silvelox.com) - [silvelox@silvelox.com](mailto:silvelox@silvelox.com)